

Estimation of Outage Capacity for Free Space Optical Links over I-K and K Turbulent Channels

Hector E. NISTAZAKIS¹, Andreas D. TSIGOPOULOS², Michalis P. HANIAS¹,
Christos. D. PSYCHOGIOS¹, Dimitris MARINOS¹, Costas AIDINIS¹, George S. TOMBRAS¹

¹ Dept. of Electronics, Computing, Telecommunications, and Control, Faculty of Physics, National and Kapodistrian University of Athens, Athens 157 84, Greece

² Dept. of Battle Systems, Naval Operations, Sea Studies, Navigation, Electronics and Telecommunications, Hellenic Naval Academy, Hadjikyriakou ave, Piraeus 18539, Greece

{enistaz, cpsycho, dmarinos, caidinis, gtombras}@phys.uoa.gr, mhanias@gmail.com, atsigo@snd.edu.gr

Abstract. *The free space optical communication systems are attracting great research and commercial interest due to their capability of transferring data over short distances, with high rate and security, low cost demands and without licensing fees. However, their performance depends strongly on the atmospheric conditions in the link's area. In this work, we investigate the influence of turbulence on the outage capacity of such a system, for weak to strong turbulence channels, modeled by the I-K and the K-distribution and we derive closed-form expressions for its estimation. Finally, using these expressions we present numerical results for various link cases with different turbulence conditions.*

Keywords

Atmospheric turbulence, outage capacity, I-K distribution, K-distribution, free space optical channels.

1. Introduction

The wireless optical communication systems, which are using the atmosphere as a propagation medium, attract much research and commercial interest over the last few years. The free space optical (FSO) communication systems achieve secure and efficient communication with low installation and operational cost [1], [2]. On the other hand, a very considerable problem that these systems face, is that for an outdoor line-of-sight, point-to-point wireless optical link, the atmospheric conditions play a very significant role on system's performance, [3]-[14]. In this work, we concentrate on one of the most important factors, the atmospheric turbulence that causes signal intensity fluctuations and fading to the received optical [15], [16]. Thus, the channel appears to have randomly time-varying characteristics due to the so called scintillation, [17], [18].

Depending on the signal's fading statistics, it could be assumed either as fast or slow [19]-[21]. When the fluctuations of the signal intensity are supposed to be very rapid,

and thus there is a difference from one symbol to another, the channel can be characterized as fast fading, while, when these fluctuations are very slow compared to the bit rate of the link, as slow. For the cases of high bit rate transmission, the channel can be characterized as slow fading. For these cases, (i.e. quasi-static channels) [19], the link's performance can be described by the outage capacity [20], [22], [23].

In this work, we extract closed form mathematical expressions for the estimation of the outage capacity of an FSO link with additive white Gaussian noise (AWGN), over atmospheric turbulence-induced, slow fading channels, as modeled either by the I-K [24], [25] or the K distribution [26]. The latter is appropriate for the cases of strong atmospheric turbulence conditions while the former for weak to strong turbulence conditions and it is a very significant distribution model for the FSO links [23], [24], [27], due to the fact that is suitable for the most cases of turbulence conditions. From the mathematical expressions of the two models' capacities, the performance of the FSO link can be estimated for every system's parameter. Finally, we present some typical numerical results for both outage capacities models.

The remaining of the paper is organized as follows. In section 2, we present the derivation procedure of the mathematical expression for the estimation of the outage capacity for slow fading channels. In section 3, we present the considered optical channel modeled with the I-K distribution and the mathematical expression for its achievable outage capacity. In section 4, we present the closed form mathematical expression for the estimation of the outage capacity of a K-distribution modeled turbulent channel. Finally, the obtained numerical results are presented and discussed in section 5. Concluding remarks are outlined in section 6.

2. Outage Capacity

We study an FSO communication system using intensity modulation/direct detection (IM/DD). The laser beams

propagate along a horizontal path through a turbulence channel with AWGN. The channel is assumed to be memoryless, stationary, with independent, identically distributed (i.i.d.) intensity slow fading statistics. The statistical channel model is [26], [28]-[30]:

$$y = sx + n = \eta Ix + n \quad (1)$$

where y is the signal at the receiver, $s = \eta I$ is the instantaneous intensity gain, η is the effective photo-current conversion ratio of the receiver, I is the normalized irradiance, x is the modulated signal (and takes values "0" or "1"), and n is the AWGN with zero mean and variance $N_0/2$ [31].

Due to the fact that the laser beam propagates through the atmosphere, which is a randomly varying channel that induces random intensity fluctuations, the instantaneous electrical SNR at the receiver $\gamma = s^2/N_0$ [26], and the instantaneous channel capacity C , are random variables too. Due to the fact that C represents the channel's capacity only for a specific moment, we estimate the outage capacity, C_{out} , which is the capacity guaranteed for a probability $(1-r)$ of the channel realizations [22]:

$$\Pr[C < C_{out}] = r. \quad (2)$$

If the pdf of C is represented as $p_C(C)$, the above probability, (2), can be estimated as [20]:

$$r = \int_0^{C_{out}} p_C(C) dC. \quad (3)$$

By evaluating the integral of equation (3), it is feasible to evaluate the outage capacity of an FSO link due to slow varying signal intensity at the receiver caused by the atmospheric turbulence conditions.

3. The I-K Distribution Channel Model

The pdf of the I-K modeled normalized signal irradiance I , is given by [24], [25],

$$p_I(I) = \begin{cases} 2\alpha(1+\rho) \left(\frac{1+\rho}{\rho} I \right)^{\frac{\alpha-1}{2}} K_{\alpha-1}(2\sqrt{\alpha\rho}) I_{\alpha-1}(2\sqrt{\alpha(1+\rho)I}) \\ \text{for } I < \frac{\rho}{1+\rho} \\ 2\alpha(1+\rho) \left(\frac{1+\rho}{\rho} I \right)^{\frac{\alpha-1}{2}} I_{\alpha-1}(2\sqrt{\alpha\rho}) K_{\alpha-1}(2\sqrt{\alpha(1+\rho)I}) \\ \text{for } I > \frac{\rho}{1+\rho} \end{cases} \quad (4)$$

where $I_\nu(\cdot)$ is the modified Bessel function of the first kind of order ν , $K_\nu(\cdot)$ is the modified Bessel function of the second kind of order ν , while α and ρ are the distribution's parameters and represent the effective number of scatters and a coherence parameter, respectively [24], [25], [27].

From (4), we obtain the following pdf for the instan-

taneous electrical SNR, γ , at the receiver,

$$p_\gamma(\gamma) = \begin{cases} 2\alpha(1+\rho) \left(\frac{1+\rho}{\rho} \right)^{\frac{\alpha-1}{2}} \frac{\gamma^{\frac{\alpha-3}{4}}}{\xi^{\frac{\alpha+1}{4}}} K_{\alpha-1}(2\sqrt{\alpha\rho}) \times \\ \times I_{\alpha-1} \left(2\sqrt{\alpha(1+\rho)} \sqrt{\frac{\gamma}{\xi}} \right) \text{ for } \gamma < \frac{\rho^2 \xi}{(1+\rho)^2} \\ 2\alpha(1+\rho) \left(\frac{1+\rho}{\rho} \right)^{\frac{\alpha-1}{2}} \frac{\gamma^{\frac{\alpha-3}{4}}}{\xi^{\frac{\alpha+1}{4}}} I_{\alpha-1}(2\sqrt{\alpha\rho}) \times \\ \times K_{\alpha-1} \left(2\sqrt{\alpha(1+\rho)} \sqrt{\frac{\gamma}{\xi}} \right) \text{ for } \gamma > \frac{\rho^2 \xi}{(1+\rho)^2} \end{cases} \quad (5)$$

where ξ is the average electrical SNR at the receiver, given by $\xi = (\eta E[I])^2 / N_0$, and $E[\cdot]$ is the expected value [26], [28], [32].

In order to evaluate the outage capacity of an optical channel modelled with the I-K distribution we should first estimate the corresponding pdf of the capacity, C .

This can be done from equation (5) and the well-known equation for the capacity, $C = B \log_2(1+\gamma)$ and has the following form,

$$p_C(C) = \begin{cases} \frac{2^{C/B+1} \ln(2)}{B\alpha^{-1}} (1+\rho) \left(\frac{1+\rho}{\rho} \right)^{\frac{\alpha-1}{2}} \frac{(2^{C/B}-1)^{\frac{\alpha-3}{4}}}{\xi^{\frac{\alpha+1}{4}}} \times \\ \times K_{\alpha-1}(2\sqrt{\alpha\rho}) I_{\alpha-1} \left(\sqrt{4\alpha(1+\rho)} \sqrt{\frac{2^{C/B}-1}{\xi}} \right), C < C_{cr} \\ \frac{2^{C/B+1} \ln(2)}{B\alpha^{-1}} (1+\rho) \left(\frac{1+\rho}{\rho} \right)^{\frac{\alpha-1}{2}} \frac{(2^{C/B}-1)^{\frac{\alpha-3}{4}}}{\xi^{\frac{\alpha+1}{4}}} \times \\ \times I_{\alpha-1}(2\sqrt{\alpha\rho}) K_{\alpha-1} \left(\sqrt{4\alpha(1+\rho)} \sqrt{\frac{2^{C/B}-1}{\xi}} \right), C > C_{cr} \end{cases} \quad (6)$$

where $C_{cr} = B \log_2(1+\rho^2 \xi / (1+\rho)^2)$.

By substituting (6) into (3) we obtain the following, two branch closed mathematical expression for the estimation of the outage capacity:

$$r = \begin{cases} 2\sqrt{\alpha\rho} \left(\frac{1+\rho}{\rho} \right)^{\frac{\alpha}{2}} \left(\frac{2^{\tilde{C}_{out}}-1}{\xi} \right)^{\frac{\alpha}{4}} K_{\alpha-1}(2\sqrt{\alpha\rho}) \times \\ \times I_\alpha \left(2\sqrt{\alpha(1+\rho)} \sqrt{\frac{2^{\tilde{C}_{out}}-1}{\xi}} \right), \tilde{C}_{out} < \tilde{C}_{cr} \\ 1 - 2\sqrt{\alpha(1+\rho)} \left(\frac{1+\rho}{\rho} \right)^{\frac{\alpha-1}{2}} \left(\frac{2^{\tilde{C}_{out}}-1}{\xi} \right)^{\frac{\alpha}{4}} \times \\ \times I_{\alpha-1}(2\sqrt{\alpha\rho}) K_{\alpha-1} \left(2\sqrt{\alpha(1+\rho)} \sqrt{\frac{2^{\tilde{C}_{out}}-1}{\xi}} \right), \tilde{C}_{out} > \tilde{C}_{cr} \end{cases} \quad (7)$$

where $\tilde{C}_{out} = C_{out}/B$ and $\tilde{C}_{cr} = C_{cr}/B$. Equation (7) which gives the value of the probability r as a function of the outage capacity C_{out} , is a strictly increasing function of C_{out} . Thus, it is easy from (7), to obtain the estimation of the outage capacity for every value of the probability r .

4. The K Distribution Channel Model

The pdf of the K-modeled signal irradiance I , is given by [26], [33],

$$p_I(I) = \frac{2\beta^{\frac{\beta+1}{2}}}{\Gamma(\beta)} I^{\frac{\beta-1}{2}} K_{\beta-1}(2\sqrt{\beta I}) \quad (8)$$

where $\Gamma(\cdot)$ is the gamma function, while the parameter β is related to the effective number of discrete scatterers [26].

From (8), with a simple transformation, the following pdf for the instantaneous electrical SNR, γ , at the receiver, is obtained [26],

$$p_\gamma(\gamma) = \frac{\beta^{\frac{\beta+1}{2}}}{\Gamma(\beta)} \frac{\gamma^{\frac{\beta-3}{4}}}{\xi^{\frac{\beta+1}{4}}} K_{\beta-1}\left(2\sqrt{\beta\sqrt{\frac{\gamma}{\xi}}}\right) \quad (9)$$

As in the case of I-K distribution, in order to evaluate the outage capacity of a slow fading optical channel modeled with the K-distribution we should first estimate the corresponding pdf for the instantaneous channel capacity, C . This can be done from the capacity's equation and (9) and is taking the following closed form expression [34],

$$p_C(C) = \frac{\ln(2)\beta^{\frac{\beta+1}{2}}}{2^{-C/B}\Gamma(\beta)} \frac{(2^{C/B}-1)^{\frac{\beta-3}{4}}}{\xi^{\frac{\beta+1}{4}}} K_{\beta-1}\left(2\sqrt{\beta\sqrt{\frac{2^{C/B}-1}{\xi}}}\right) \quad (10)$$

From (3), (10), the following closed form mathematical expression for the estimation of the outage capacity of a K-distribution modeled optical channel, is obtained, [34]:

$$r = \frac{(2^{\tilde{C}_{out}}-1)^{\frac{\beta+1}{4}}}{(\sqrt{\xi}/\beta)^{\frac{\beta+1}{2}}\Gamma(\beta)} G_{2,1}^{2,1}\left[\beta\sqrt{\frac{2^{\tilde{C}_{out}}-1}{\xi}} \middle| \begin{matrix} 1-\beta \\ 2 \end{matrix} ; \begin{matrix} \beta-1 \\ 2 \end{matrix}, \begin{matrix} 1-\beta \\ 2 \end{matrix}, \begin{matrix} -\beta+1 \\ 2 \end{matrix} \right] \quad (11)$$

where $G_{m,n}^{p,q}[\cdot]$ is the Meijer G-function, [35], which is a standard built-in function in many of the well-known mathematical software packages. Taking into account that r , in equation (10), is a strictly increasing function of C_{out} , this expression can be used for the estimation of the outage capacity for every value of the probability r .

5. Numerical Results

Using the closed form mathematical expressions obtained in (7) and (10) the estimation of the outage channel capacity of slow fading free space optical links is feasible.

From (7) we can evaluate the outage capacity of a I-K modeled turbulence wireless optical channel, as a function of the average electrical SNR, ξ , for different values of the probability r and the distribution parameters ρ and α which are directly "connected" to the atmospheric turbulence conditions of the atmosphere. In this work, we present results for two different values of r , (i.e. 0.1 and 0.01) which are the most common in practical communication systems [22]. Moreover, we investigate two different values for ρ (i.e. 0.1 and 10) and three for α (i.e. 1, 2, and 3). The parameter α , as mentioned above represents the effective number of scatterers in the path between the transmitter and the receiver. Thus, this parameter is a measure of the atmospheric turbulence conditions and increases its value as the turbulence is getting weaker. It is clear that equation (7) can give results for any other case and for any other value of the above mentioned parameters.

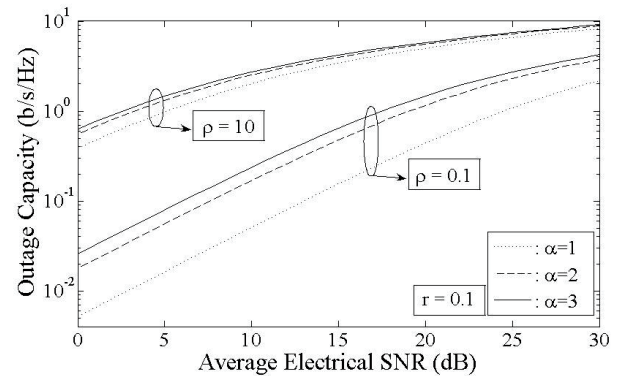


Fig. 1. Outage channel capacity C_{out}/B for $r = 0.1$, of an FSO channel modeled with the I-K distribution, versus the average electrical SNR, ξ , for $\rho = 0.1$ and 10, and $\alpha = 1, 2$ and 3.

Thus, in Fig. 1, we present the obtained results for $r = 0.1$, for the two different values of ρ and the respective three values for α , while in Fig. 2 we show the corresponding results for $r = 0.01$.

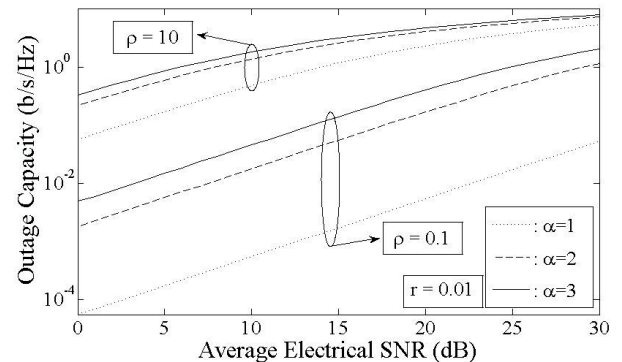


Fig. 2. Outage channel capacity C_{out}/B for $r = 0.01$, of an FSO channel modeled with the I-K distribution, versus the average electrical SNR, ξ , for $\rho = 0.1$ and 10, and $\alpha = 1, 2$ and 3.

In Fig. (3) we present the corresponding results (i.e. $r = 0.1$ and $r = 0.01$) for the case of K-distribution modeled optical channel, for three different values of the parameter

β , (i.e. $\beta = 1$, $\beta = 2$ and $\beta = 3$), which is related to the atmospheric turbulence conditions. Thus, the value of β is getting smaller as the atmospheric turbulence is getting stronger [26]. For larger values of β , the obtained results are slightly different from those with $\beta = 3$.

These results show that the atmospheric turbulence conditions affect the outage capacity of the FSO communication channels. More specifically, it is clear, that this influence is getting stronger as turbulence is getting stronger and as the probability r is requested to be smaller.

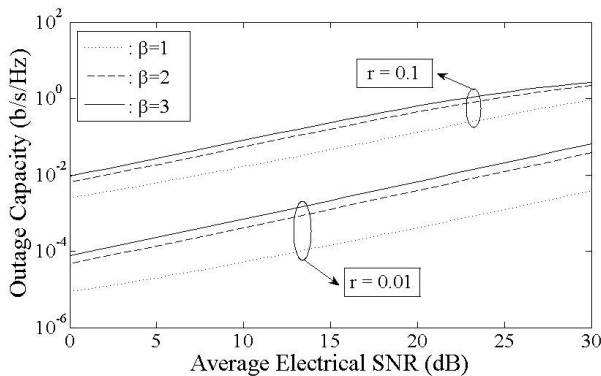


Fig. 3. Outage channel capacity C_{out}/B for $r = 0.1$ and 0.01 , of an FSO channel modeled with the K distribution, versus the average electrical SNR, ξ , for $\beta = 1, 2$ and 3 .

6. Conclusions

In this work, we derive two closed form mathematical expressions for the estimation of the outage capacity of FSO channels with slow fading statistics, modeled with both the I-K and the K-distribution. Using these two expressions, the practical outage channel capacity can be estimated for different values of the outage capacity probability and circumstances of the atmospheric turbulence conditions. This is feasible due to the fact that the I-K distribution model describes accurately the links under weak to strong turbulence conditions, while the K distribution model is suitable for strong to very strong turbulence conditions. Thus, we investigate the influence of the turbulence, through the parameters α , ρ and β , of the I-K and the K distribution model, respectively, on the performance of the optical link. These results, and others that can be obtained from the two closed form mathematical expressions, can help in the design of effective FSO communication systems, due to the fact that the channel capacity is a very significant magnitude for the evaluation of link's performance.

References

- [1] KEDAR, D., ARNON, S. Urban optical wireless communication network: the main challenge and possible solutions. *IEEE Commun. Mag.*, 2004, vol. 42, no. 5, p. S2 - S7.
- [2] ARNON, S. Optical wireless communications. *Encycl. Opt. Eng.* Marcel Dekker Inc. New York, 2003, p. 1866 - 1886.
- [3] ANDREWS, L. C. *Atmospheric Optics*. SPIE Optical Engineering Press, 2004. ISBN: 0-8194-5318-8.
- [4] PROKES, A. Atmospheric effects on availability of free space optics systems. *Optical Engineering*, 2009, vol. 48, no. 6, art. no. 066001.
- [5] MUHAMMAD, S. S., AWAN, M. S., REHMAN, A. PDF estimation and liquid water content based attenuation modeling for fog in terrestrial FSO links. *Radioengineering*, 2010, vol. 19, no. 2, p. 228 - 236.
- [6] PESEK, J., FISHER, O., SVOBODA, J., SCHEJBAL, V. Modeling of 830 nm FSO link attenuation in fog or wind turbulence. *Radioengineering*, 2010, vol. 19, no. 2, p. 237 - 241.
- [7] NADEEM, F., JAVORNIK, T., LEITGEB, E., KVICERA, V., KANDUS, G. Continental fog attenuation empirical relationship from measured visibility data. *Radioengineering*, 2010, vol. 19, no. 4, p. 596 - 600.
- [8] KHAN, M. S., AWAN, M. S., MUHAMMAD, S. S., FAISAL, M., MARZUKI, M., NADEEM, F., LEITGEB, E. Probabilistic model for free-space optical links under continental fog conditions. *Radioengineering*, 2010, vol. 19, no. 3, p. 460 - 465.
- [9] GAPPMAIR, W., FLOHBERGER, M. Error performance of coded FSO links in turbulent atmosphere modeled by Gamma-Gamma distribution. *IEEE Trans. Wireless Commun.*, 2009, vol. 8, no. 5, p. 2209-2213.
- [10] NISTAZAKIS, H. E., KARAGIANNI, E. A., TSIGOPOULOS, A. D., FAFALIOS, M. E., TOMBRAS, G. S. Average capacity of optical wireless communication systems over atmospheric turbulence channels. *J. Lightw. Technol.*, 2009, vol. 27, no. 8, p. 974-979.
- [11] POPOOLA, W. O., GHASSEMLOOY, Z. BPSK subcarrier intensity modulated free-space optical communications in atmospheric turbulence. *J. Lightw. Technol.*, 2009, vol. 27, no. 8, p. 967-973.
- [12] WANG, Z., ZHONG, W.-D., FU, S., LIN, C. Performance comparison of different modulation formats over free-space optical (FSO) turbulence links with space, diversity reception technique. *IEEE Photonics Journal*, 2009, vol. 1, no. 6, p. 277-285.
- [13] LIU, C., YAO, Y., SUN, Y., ZHAO, X. Average capacity for heterodyne FSO communication systems over gamma-gamma turbulence channels with pointing errors. *Electronics Letters*, 2010, vol. 46, no. 12, p. 851-853.
- [14] MORADI, H., FALAHPOUR, M., REFAI, H. H., LOPRESTI, P. G., ATIQUZZAMAN, M. Availability modeling of FSO/RF mesh networks through turbulence-induced fading channels. *INFOCOM IEEE Conference on Computer Communications Workshops*, 2010, doi: 10.1109/INFCOMW.2010.5466617.
- [15] MAJUMDAR, A. K. Free-space laser communication performance in the atmospheric channel. *J. Opt. and Fiber Commun. Research*, 2005, vol. 2, p. 345 - 396.
- [16] KAHN, J. M., BARRY, J. R. Wireless infrared communications. *Proc. IEEE*, 1997, vol. 85, no. 2, p. 265 - 298.
- [17] ANDREWS, L. C., PHILLIPS, R. L., HOPEN, C. Y. Laser beam scintillation with applications. *SPIE Optical Engineering Press*, Bellingham, WA 2006.
- [18] ANDREWS, L. C., AL-HABASH, M. A., HOPEN, C. Y., PHILLIPS, R. L. Theory of optical scintillation: Gaussian beam wave model. *Waves in Random Media*, 2001, vol. 11, p. 271 - 291.
- [19] SIMON, M. K., ALOUINI, M. S. *Digital Communications over Fading Channels*. Wiley Interscience, 2000.
- [20] NISTAZAKIS, H. E., TOMBRAS, G. S., TSIGOPOULOS, A. D., KARAGIANNI, E. A., FAFALIOS, M. E. Capacity estimation of optical wireless communication systems over moderate to strong

turbulence channels. *Journal of Communications and Networks*, 2009, vol. 11, no. 4, p. 387 - 392.

- [21] BELMONTE, A., KAHN, J. M. Capacity of coherent free space optical links using atmospheric compensation techniques. *Optics Express*, 2009, vol. 17, no. 4, p. 2763 - 2773.
- [22] FURRER, S., CORONEL, P., DAHLHAUS, D. Simple ergodic and outage capacity expressions for correlated diversity Ricean fading channels. *IEEE Trans. Wireless Commun.*, 2006, vol. 5, no. 7, p. 1606 - 1609.
- [23] FARID, A. A., HRANILOVIC, S. Outage capacity optimization for free-space optical links with pointing errors. *IEEE/OSA J. Lightwave Technology*, July 2007, vol. 25, no. 7, p. 1702 - 1710.
- [24] ANDREWS, L. C., PHILIPS, R. L. I-K distribution as a universal propagation model of laser beams in atmospheric turbulence. *Journal of the Optical Society of America A*, 1985, vol. 2, no. 2, p. 160 - 163.
- [25] ANDREWS, L. C., PHILIPS, R. L. Mathematical genesis of the I-K distribution for random optical fields. *Journal of the Optical Society of America A*, 1986, vol. 3, no. 11, p. 1912 - 1919.
- [26] SANDALIDIS, H. G., TSIFTIS, T. A. Outage probability and ergodic capacity of free-space optical links over strong turbulence. *Electronics Letters*, 2008, vol. 44, no. 1, p. 46 - 47.
- [27] LETZEPI, N., FABREGAS, A. G. Outage probability of the free-space optical channel with doubly stochastic scintillation. *IEEE Transactions on Communications*, 2009, vol. 57, no. 10.
- [28] ZHANG, Y., SI, C., WANG, Y., WANG, J., JIA, J. Capacity for non-Kolmogorov turbulent optical links with beam wander and pointing errors. *Optical Laser Technology*, 2011, doi:10.1016/j.optlastec.2011.04.001.
- [29] LI (TIFFANY) J., UYSAL M. Optical wireless communications: system model, capacity and coding. In *Proc. 58th Vehicular Tech. Conf.* 2003. Orlando (USA), Oct. 2003, IEEE, vol. 1, p. 168-172.
- [30] NISTAZAKIS, H. E., TSIFTIS, T. A., TOMBRAS, G. S. Performance analysis of free-space optical communication systems over atmospheric turbulence channels. *IET Communications*, 2009, vol. 3, no. 8, p. 1402-1409.
- [31] GARCIA-ZAMBRANA, A., CASTILLO-VAZQUEZ, B., CASTILLO-VAZQUEZ, C. Average capacity of FSO links with transmit laser selection using non-uniform OOK signalling over exponential atmospheric turbulence channels. *Optics Express*, 2010, vol. 18, no. 19, p. 20445 - 20454.
- [32] NISTAZAKIS, H. E., ASSIMAKOPOULOS, V. D., TOMBRAS G. S. Performance estimation of free space optical links over negative exponential atmospheric turbulence channels. *Optik-Int. J. Light Electron Opt.*, 2011, doi:10.1016/j.ijleo.2011.01.013.
- [33] GARCIA-ZAMBRANA, A., CASTILLO-VAZQUEZ, C., CASTILLO-VAZQUEZ, B., HINIESTA-GOMEZ, A. Selection transmit diversity for FSO links over strong atmospheric turbulence channels. *IEEE Photonics Technology Letters*, 2009, vol. 21, no. 14, p. 1017 - 1019.
- [34] NISTAZAKIS, H. E., MARINOS, D., HANIAS, M., AIDINIS, C., TSILIS, M., TOMBRAS, G. S., TSIGOPOULOS, A. D., FAFALIOS, M. E. Estimation of capacity bounds of free space optical channels under strong turbulence conditions. In *18th Int. Conf. MIKON2010*, 2010, Proc. in IEEE site.
- [35] ADAMCHIK, V. S., MARICHEV, O. I. The algorithm for calculating integrals of hypergeometric type function and its realization in reduce system. In *Proc. Int. Conf. on Symbolic and Algebraic Computation*. Tokyo (Japan), 1990, p. 212 - 224.

About Authors

Hector NISTAZAKIS was born in Athens, Greece 1974. He received his B.Sc. (in Physics) in 1997, the M.Sc. (in Electronics and Telecommunications) in 1999 and the Ph.D. (in Physics and Telecommunications) in 2002, degrees from the National and Kapodistrian University of Athens. Currently, he is an Assistant Professor in the Division of Electronics, Computing, Telecommunications and Control, Faculty of Physics in the National and Kapodistrian University of Athens. He has authored or co-authored more than 90 journal and conference refereed papers. He acts as a reviewer for several international journals and conferences. His current research interests include topics as free space optical communication systems, fiber optics communications, wireless communications, nonlinear photonics, nonlinear phenomena.

Andreas TSIGOPOULOS was born in Athens on 1962. He obtained the Diploma degree of Electrical Engineering from the University of Patras in 1985, Post-Graduate Degree in Microwaves and Optoelectronics from the Ecole Nationale Supérieure des Telecommunications, Paris in 1987, and the Doctorate degree in Optoelectronics from the Informatics Dept. of Athens University in 1991. He has worked for years as a Senior Researcher of the Optical Communications Group of Athens University in topics related to optoelectronic devices and applications and as a Researcher of the Optoelectronic Devices Group of ALCATEL, Paris. He has worked as an Expert Engineer of the Planning Dept. of Greek PTT in projects concerning the design and introduction of new technologies in the optical fiber trunk network of Greece. He is a Member of the Non Linear Dynamics Group of the Physics Dept. of Athens University in topics concerning propagation in non-linear media. Since December 2008 he is an Assistant Professor in the Dept. of Battle Systems, Naval Operations, Sea Studies, Navigation, Electronics & Telecommunications of the Hellenic Naval Academy. He is the author of several publications in international journals and conferences. His current research interests include non-linear propagation phenomena and wireless optical communication systems. He is Member of the Technical Chamber of Greece and Member of AFCEA.

Michael HANIAS was born in Athens, Greece in 1961. He received his B.Sc. and Ph.D. degree from Aristotelian University of Thessaloniki. He was Teaching and Research Assistant at the Laboratory of Solid State, Physics Dept., Aristotelian University of Thessaloniki and he was Scientific collaborator at the Dept. of Physics and Chemistry in Chalkis Technical University. He was involved in various NATO & European Union R&D projects related to Chaotic electrical properties of semiconductors and semiconductors devices. Currently he is a Research Associate in the National and Kapodistrian University of Athens at the Faculty

of Physics, Dept. of Electronics, Computers, Telecommunications and Control. Moreover, he has published many papers and conference proceedings and he acts as a referee for many scientific journals. His research interests include electronic transport phenomena, non linear chaotic circuits, chaos in electronics, time series prediction, neural networks, econophysics and wireless optical communication systems.

Christos PSYCHOGIOS was born in Athens, Greece 1985. He received his B.Sc. (in Physics) degree from the National and Kapodistrian University of Athens in 2010. Currently, he is a M.Sc. student in Electronics, Computers and Control. He has co-authored more than 5 journal and conference refereed papers. His current research interests include topics as free space optical communication systems, computer programming, software and hardware designing.

Dimitris MARINOS holds a BSc in Computer Systems Engineering from the Technological Educational Institute of Piraeus (2005) and he has graduated his MSc in Communication Technology at the field of Microelectronics at the University of Ulm (2008). Currently he is a PhD candidate at the Physics dept. of the National Kapodistrian University of Athens conducting research on high data rate wireless optical communications and the optical multipath effect. His main area of expertise is based on wireless optical communication where he investigated the wireless optical OFDM transmission scheme. In ATENAA he worked mainly in the design and investigation of wireless optical CDMA transmission scheme for the intra-cabin communication and in MINERVAA on a diffused IR

wireless transceiver for in cabin information transfer investigating OFDM modulation schemes and also for implementing a portable enclosure for health monitoring using several type of medical sensors. He has co-authored more than 5 journal and conference refereed papers.

George TOMBRAS was born in Athens, Greece in 1956. He received the B.Sc. degree in Physics from Aristotelian University of Thessaloniki, Greece, the M.Sc. degree in Electronics from University of Southampton, UK, and the Ph.D. degree from Aristotelian University of Thessaloniki, in 1979, 1981, and 1988, respectively. From 1981 to 1989 he was Teaching and Research Assistant and, from 1989 to 1991, Lecturer at the Laboratory of Electronics, Physics Dept., Aristotelian University of Thessaloniki. During 1985–86, he served his military service as a Research Assistant at the Research Center for National Defense. From 1990 to 1991 he was on sabbatical leave at the Institute of Informatics and Telecommunications of the National Center for Science Research “Demokritos,” Athens, where he was involved in various European Union R&D projects related to Mobile Communication Systems. Since 1991, he has been with the Laboratory of Electronics, Faculty of Physics, University of Athens, where currently is a Professor of Electronics and Director of the Dept. of Electronics, Computers, Telecommunications and Control. His research interests include mobile communications, analog and digital circuits and systems, as well as instrumentation, measurements, and audio engineering. He is the author of the textbook “Introduction to Electronics” (in Greek) and has authored or co-authored more than 100 journal and conference refereed papers and many technical reports.